



Poliweld DF - Afzuigtafel



Poliweld DF – Afzuigtafel voor lasrook en stof

De Poliweld DF is een robuuste, verzinkte afzuigtafel voor het efficiënt filteren van lasrook en fijnstof. Dankzij het Down Flow Concept en horizontale cartridgefilters biedt de tafel maximale filtratie. Plug & Play installatie, optionele uitbreidingen en onderhoudsvriendelijk ontwerp maken de Poliweld DF ideaal voor veilige en schone werkplekken in de metaalbewerking.

Technische Specificaties


Technical features		Model Poliweld DF		
		DF 1500	DF 2000	DF 2500
Power	kW	2.2	3	4
Maximum flow rate	m ³ /h	4000	5000	6000
Number of cartridges	Ø325mm H 660 mm	3	5	6
Filtering area	m ²	54	90	108
IFA/BGIA certification		CELLULOSE		
RPM		2900	2900	2900
Voltage	V	230/400	230/400	230/400
	Hz	50	50	50
Weight	Kg	380	465	535
Filter dimensions	mm	2193 x 1118 x 1411	2693 x 1118 x 1411	3193 x 1118 x 1411
		Maximum available load		
Load distribution	Kg/m ²	250	250	250
Available placing surface	m ²	1.3	1.7	2.1



DUTCH AIRWORKS PRODUCT BLAD

Afmetingen

MODEL	DIMENSIONS (mm)		
	A	B	C
Poliweld DF 1500	1500	2195	450
Poliweld DF 2000	2000	2695	450
Poliweld DF 2500	2500	3195	450

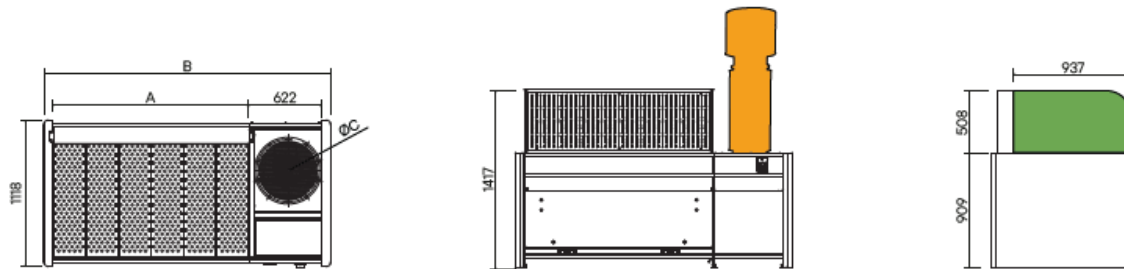

■ Afon silencer and diffuser kit (Optional)

■ Non-suction fixed side walls (Optional)

Werking



- ① Fire extinguishing system (recommended option)
- ② Dusty air inlet
- ③ Metallic mesh filter
- ④ Collection drawer
- ⑤ Filter cartridges
- ⑥ High-speed suction tunnel
- ⑦ Compressed air tank (PoliJet DF)
- ⑧ Fan
- ⑨ Filtered air outlet
- ⑩ Dusty air outlet
- ⑪ Economiser
- ⑫ Run/stop switch