



DUTCH AIRWORKS PRODUCT BLAD

CLEANGO WALL - Mobiele Afzuigunit



CLEANGO WALL - Mobiele Wandafzuigunit

De CLEANGO WALL is een ruimtebesparende, wandgemonteerde afzuigunit voor stof en rook in werkruimtes. Met een Dynaflex afzuigarm van 2 of 3 meter biedt de unit flexibele positionering zonder weerstand. Uitgerust met een filtermonitor voor optimaal onderhoud en filterprestaties, is de CLEANGO WALL ideaal voor ruimtes met beperkte vloeroppervlak. Eenvoudige installatie en onderhoud zorgen voor maximale efficiëntie.

Technische Specificaties


Technical features		Model CleanGo		
		CleanGo	W3	Wall
Power	kW	1,1	1,1	1,1
Nominal air flow	m³/h	1400	1300	1400
Air flow capacity at arm Ø160	m³/h	1000	1100	1000
Number of Arms Dynaflex	mm 3 mt	1 x Ø160	1 x Ø160	1 x Ø160
Number of cartridges	Ø325mm H 400mm	1	1	1
Filtering Surface	m²	12	12	12
Cartridge classification		CELLULOSE		
R.P.M.		2846	2846	2846
STD power supply	V	230/400	230/400	230/400
	Hz	50	50	50
Noise level	dB	72	73	72
Total weight	kg	80	80	80



DUTCH AIRWORKS PRODUCT BLAD

Afmetingen

MODEL	DIMENSIONS (mm)			
	A	B	C	D
CleanGo Wall	700	700	812	-

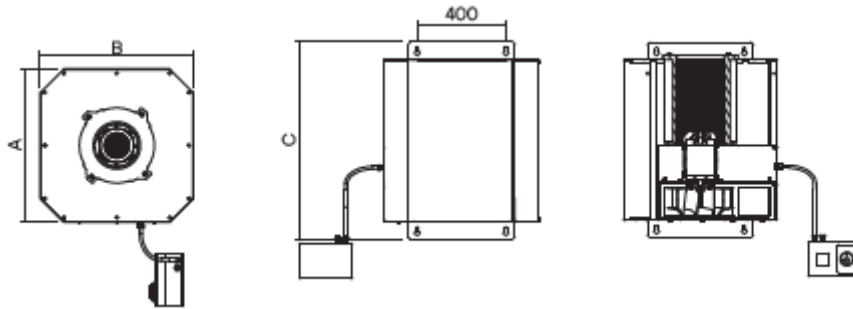

CleanGo Wall



POLLUTED AIR



FILTERED AIR

- ① Dusty air inlet
- ② Fan
- ③ Filter cartridges
- ④ Filtered air outlet